


WIRELOCK

WL 4-07

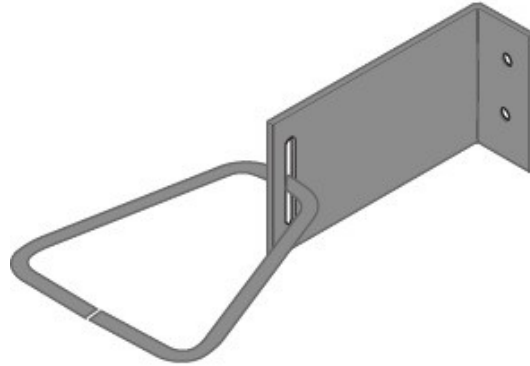

Anchor plate only (Ties sold separately)

WIRELOCK WL 4-07 veneer anchor plate and tie system provides adjustability and differential movement between the masonry veneer and the structural wall system.

PRODUCT DATA

- Manufactured from 16 gauge sheet metal conforming to ASTM A366
 - Conforms to CSA A370-14
- Hot Dipped Galvanized after Fabrication**
ASTM A153M-09, ASTM A123-13 (1.5 oz per sq. ft.)
- Stainless Steel Type 304**
16gauge, ASTM 167 / A240 / A240-13
- Designed for mounting on the surface of sheathing or studs
 - Plate length varies to accommodate insulation thicknesses from 0" to 4"

Base Plate Dimensions:

- 16gauge (1.5mm) thick x 2" (50mm) wide with a 1" (25mm) bend

FINISHES & SIZES

Finishes:

- Hot Dipped Galvanized after fabrication
ASTM A153M-09, ASTM A123-13 (1.5 oz per sq. ft.)
- Stainless Steel: ASTM A580, A240, A240M-13, AISI Type 304 16 gauge, ASTM 167

Available Sizes:

0" Insulation	1" Insulation
1½" Insulation	2" Insulation
3" Insulation	4" Insulation

Packaging:

- 250 pieces per box

Distributed by:



Masonry Specialty Products Since 1977