


# WIRELLOCK

## WL 6-07

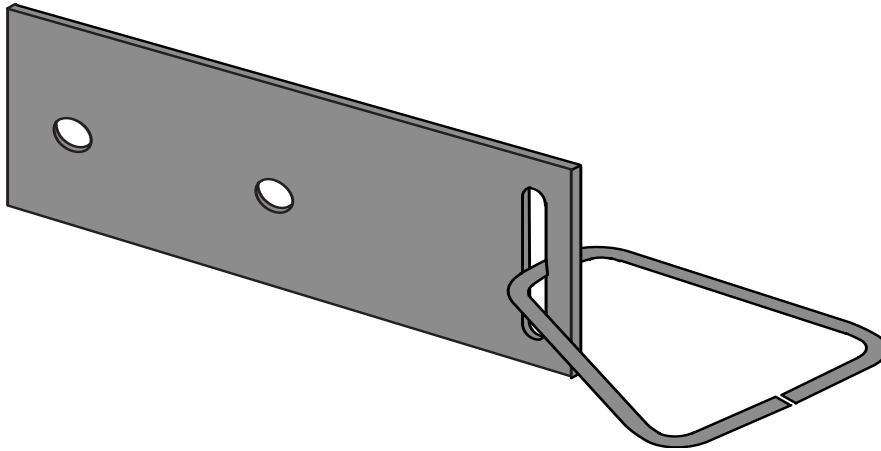

*Anchor plate only  
(Ties sold separately)*

*WIRELLOCK WL6-07 veneer anchor plate and tie system provides adjustability and differential movement between the masonry veneer and the steel stud. The anchor plate is designed to be mounted on the surface of the stud.*

### PRODUCT DATA

- Manufactured from 16 gauge sheet metal conforming to ASTM A366
  - Conforms to CSA370-14
- Hot Dipped Galvanized after Fabrication**  
ASTM A153M-09, ASTM A123-13 (1.5 oz per sq. ft.)
- Stainless Steel Type 304**  
16gauge, ASTM 167 / A240/A240M-13
- Designed to be mounted on the surface of the stud.
  - Plate length can accommodate various insulation thicknesses from 0" to 4" plus gypsum sheathing.

#### Base Plate Dimensions:

- 16gauge (1.5mm) thick x 2" (50mm) wide with the length to accommodate various

### FINISHES & SIZES

#### Finishes:

- Hot Dipped Galvanized after fabrication  
ASTM A153M-09, ASTM A123-13 (1.5 oz per sq. ft.)
- Stainless Steel: ASTM A580  
AISI Type 304 16 gauge, ASTM 167

#### Available Sizes:

0" Insulation	1" Insulation
1½" Insulation	2" Insulation
3" Insulation	4" Insulation

Distributed by:

**JV BUILDING  
PRODUCTS**

*Masonry Specialty Products Since 1977*