



# WIREL<sub>o</sub>CK

## Ladder Reinforcement WL-10 Ladder Reinforcement

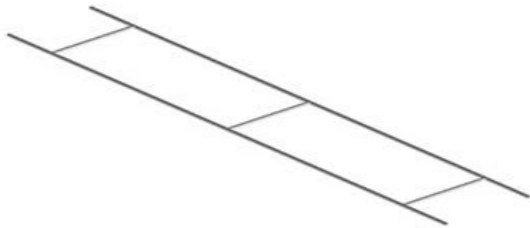

*Cross Rods welded at 16" (400mm) O.C.*

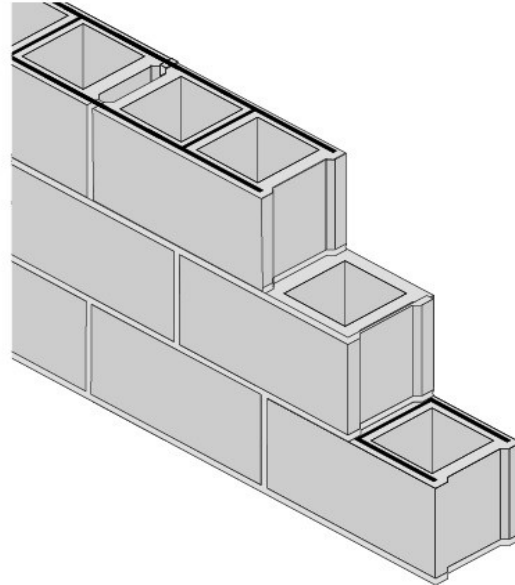

### PRODUCT DATA

WIREL<sub>o</sub>CK joint reinforcement products conform to ASTM A951/ASTM A951M-14, ACI 530 & CSA standard A370-14.

**Wire** (cold drawn steel wire):  
Conforms to ASTM A82-07  
Tensile Strength : 80,000 psi  
Yield Point : 70,000 psi minimum

**Mill Galvanized** (Zinc-Coated):  
ASTM A641M-09a (2014) (0.10 oz per sq. ft.)

**Hot Dip Galvanized** after fabrication (Zinc-Coated):  
ASTM A153M-09, ASTM A123-13 (1.5 oz per sq. ft.)

**Stainless Steel:**  
ASTM 580 / 580M Type 304

**Wire Diameter:**  
9 Gauge (0.148")  
3/16" (0.187")

### FINISHES & SIZES

#### Finishes:

- Mill Galvanized Coating: ASTM A641 (0.1 oz/ft<sup>2</sup>)
- Hot Dip Galvanized After Fabrication : ASTM A 153 (1.5 oz per sq. ft.)
- Stainless Steel: ASTM A580—AISI Type 304

#### Wire Gauge:

- Standard  
9 Gauge Side Rods x 9 Gauge Cross Rods
- Extra Heavy Duty  
3/16" Side Rods x 3/16" Cross Rods

#### Block Size:

4"      6"      8"      10"      12"  
Manufactured in 10' lengths

Distributed by:

**JV BUILDING PRODUCTS**

*Masonry Specialty Products Since 1977*