


WIREL_{LOCK}

Truss Reinforcement WL-30 Truss Reinforcement



Continuous diagonal cross rods welded at 8" (200mm) O.C.

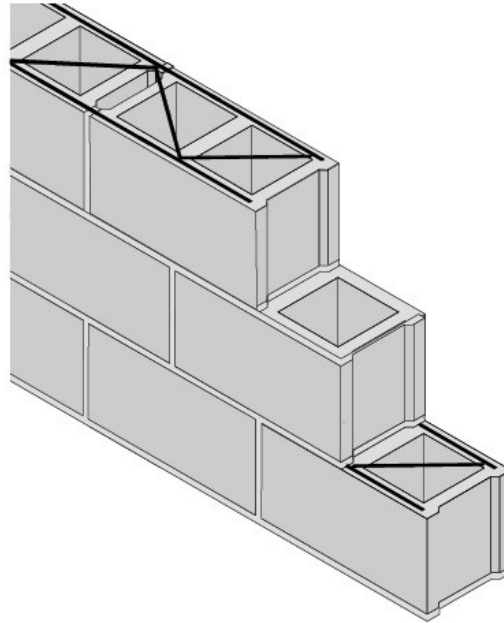

PRODUCT DATA

WIREL_{LOCK} joint reinforcement products conform to ASTM A951/ASTM A951M-14, ACI 530 & CSA standard A370-14.

Wire (cold drawn steel wire):
Conforms to ASTM A82-07
Tensile Strength : 80,000 psi
Yield Point : 70,000 psi minimum

Mill Galvanized (Zinc-Coated):
ASTM A641M-09a (2014) (0.10 oz per sq. ft.)

Hot Dip Galvanized after fabrication (Zinc-Coated):
ASTM A153M-09, ASTM A123-13 (1.5 oz per sq. ft.)

Stainless Steel:
ASTM 580 / 580M Type 304

Wire Diameter:
9 Gauge (0.148")
3/16" (0.187")

FINISHES & SIZES

Finishes:

- Mill Galvanized Coating: ASTM A641 (0.1 oz/ft²)
- Hot Dip Galvanized After Fabrication : ASTM A 153 (1.5 oz per sq. ft.)
- Stainless Steel: ASTM A580—AISI Type 304

Wire Gauge:

- Standard
9 Gauge Side Rods x 9 Gauge Cross Rods
- Extra Heavy Duty
3/16" Side Rods x 3/16" Cross Rods

Block Size:

4" 6" 8" 10" 12"
Manufactured in 10' lengths

Distributed by:

JV BUILDING PRODUCTS

Masonry Specialty Products Since 1977